

Enquiry N°:
Created by: SB / Approved by: DB

SERVO MOTOR 089LDA306FFCTC

089LDA306FFCTC




Definition

Type	Unimotor HD	
Frame Size (mm)	089	
Voltage	L	48 Vdc
Magnet type	D	High Dynamic
Frame Length	A	
Speed (min ⁻¹)	30	3000
Brake	6	Braked
Connection type	F	Flying leads 0.5m Power cut ends, Signal 16-way Molex connector
Output shaft	F	Half key and full key supplied in bag
Feedback device code	CT	4096 ppr Incremental encoder (TDK)
Inertia & thermistor	C	Standard inertia + KTY84-130 thermistor
PCD	100	100 (FF 100 / 80)
Shaft Diameter	190	19j6 x 40.0
Fan Box	-	
Insulation class	F	
UL Motor / UL Stator	UL Stator	

Nominal characteristics

Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (Nm)	3.2	Stall Current (A)	23.0
Rated Torque (Nm)	3.0	Nominal Current (A)	21.4
Motor Peak Torque (Nm)	9.6	Kt (Nm/A)	0.14
Rated Power (kW)	0.94	Ke (V/kmin ⁻¹)	8.5
Winding Thermal Time Constant (s)	85	R (ph-ph) (Ohm)	0.07
Number of Poles	10	L (ph-ph) (mH)	0.4
Typical Cogging (Nm)	0.05		
Inertia (kg.cm ²)	1.13	Weight (kg)	~4.4
Ingress Protection Level (IP)	IP54		
Brake	Type 6	Static Torque (N.m)	10
Release Time (ms)	110	Backlash (°)	3
Brake Supply Voltage (V)	24	Brake Coil Power (W)	18

Torque / speed graph


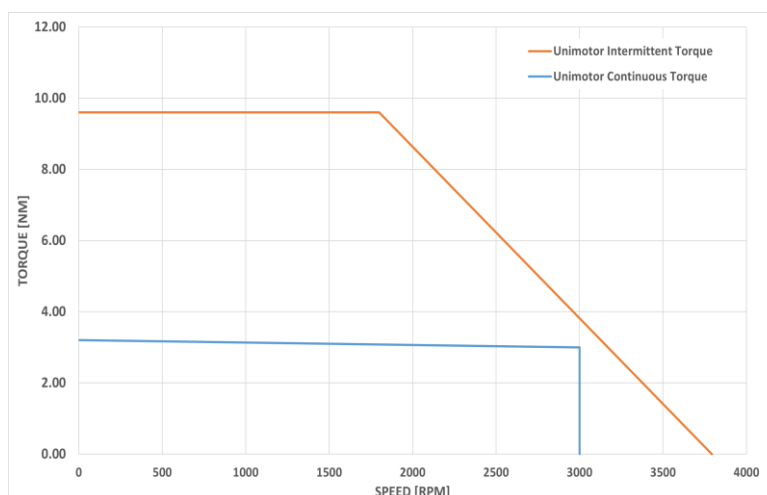


Enquiry N°:

Created by: SB / Approved by: DB

SERVO MOTOR 089LDA306FFCTC

Motors (° & mm)

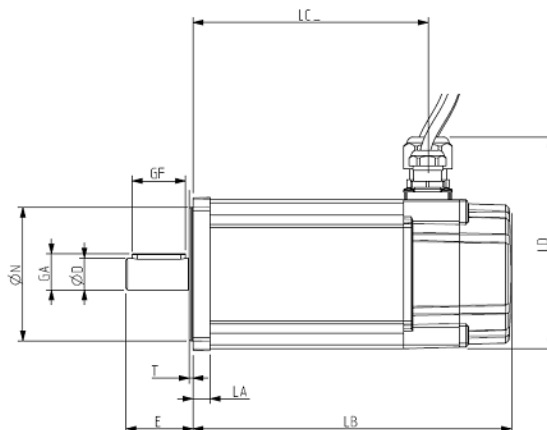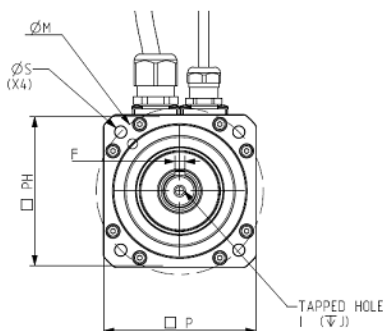

LB	Total length	187.9
LC	Signal connector position	150.6
LA	Flange thickness	10.3
T	Register Length	2.2
N	Register Diameter	80.0
LD	Connector overall height	~119
P	Flange Square	91.0
S	Fixing Hole Diameter	7.0
M	Fixing hole PCD	100.0
PH	Motor Housing Width	89.0
D	Shaft Diameter	19j6
E	Shaft Length	40.0
GA	Key Height	21.5
GF	Key Length	32.0
G	Key to Shaft End	3.7
F	Key Width	6.0
I	Tapped Hole Thread Size	M6 x 1.0
J	Tapped Hole Depth	17.0
	Mounting Bolt	M6


Motor electrical interface Connectors option:

Feedback device code: CT - 4096 ppr Incremental encoder (TDK),
43025-1600 Molex 16-way female signal connector (0.5m lead)


Connection type: Flying leads 0.5m Power cut ends, Signal 16-way
Molex connector

SIGNAL FUNCTION	PIN END B
Thermistor	1
Thermistor	2
CH S1	3
CH S2	4
CH S3	5
CH A	6
CH B	7
CH Z	8
GND	9
VCC	10
CH S1-	11
CH S2-	12
CH S3-	13
CH A-	14
CH B-	15
CH Z-	16

PIN DETAIL

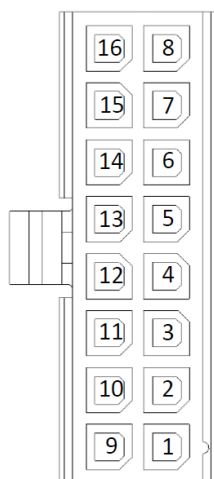

16 – WAY CONNECTOR

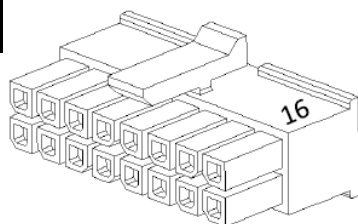

POWER FLYING LEADS:

500mm from M16 gland to cable end
4 cores of 12 AWG UL 1330 wire, with
polyolefin heat-shrink sleeve

ORANGE (x 1)	U
RED (x 1)	V
YELLOW (x 1)	W
GREEN / YELLOW (x 1)	Earth

Brake connection: 500mm (from M16 gland to customer end)
2 cores of 18 AWG UL1330 wire, insulated
2-Way Molex Minifit connector 39-01-3023

Brake connections

Pin 1	White	+ve
Pin 2		-ve



Enquiry N°:

Created by: SB / Approved by: DB

SERVO MOTOR 089LDA306FFCTC

CT Encoder

Manufacturer:	CTD / Motion TDK
Model:	Magnetic
Signal periods:	4096
Output interface:	Differential
Supply voltage:	5V +/- 10%
Accuracy	±0.2 Deg